


# Mid size duct cage



- Notes:-
- Proof Load test to be performed to AS4991
  - Duragal steel construction
  - Cold galv spray all welds
  - 50x50x04 Galv Mesh ARC panels
  - Galvabond plate floor
  - All welds to be 5mm CFW on all joints

**Dynamic Rigging Hire Pty Ltd**  
96 North View Drive  
Sunshine West Vic 3020  
(03)8360 8910

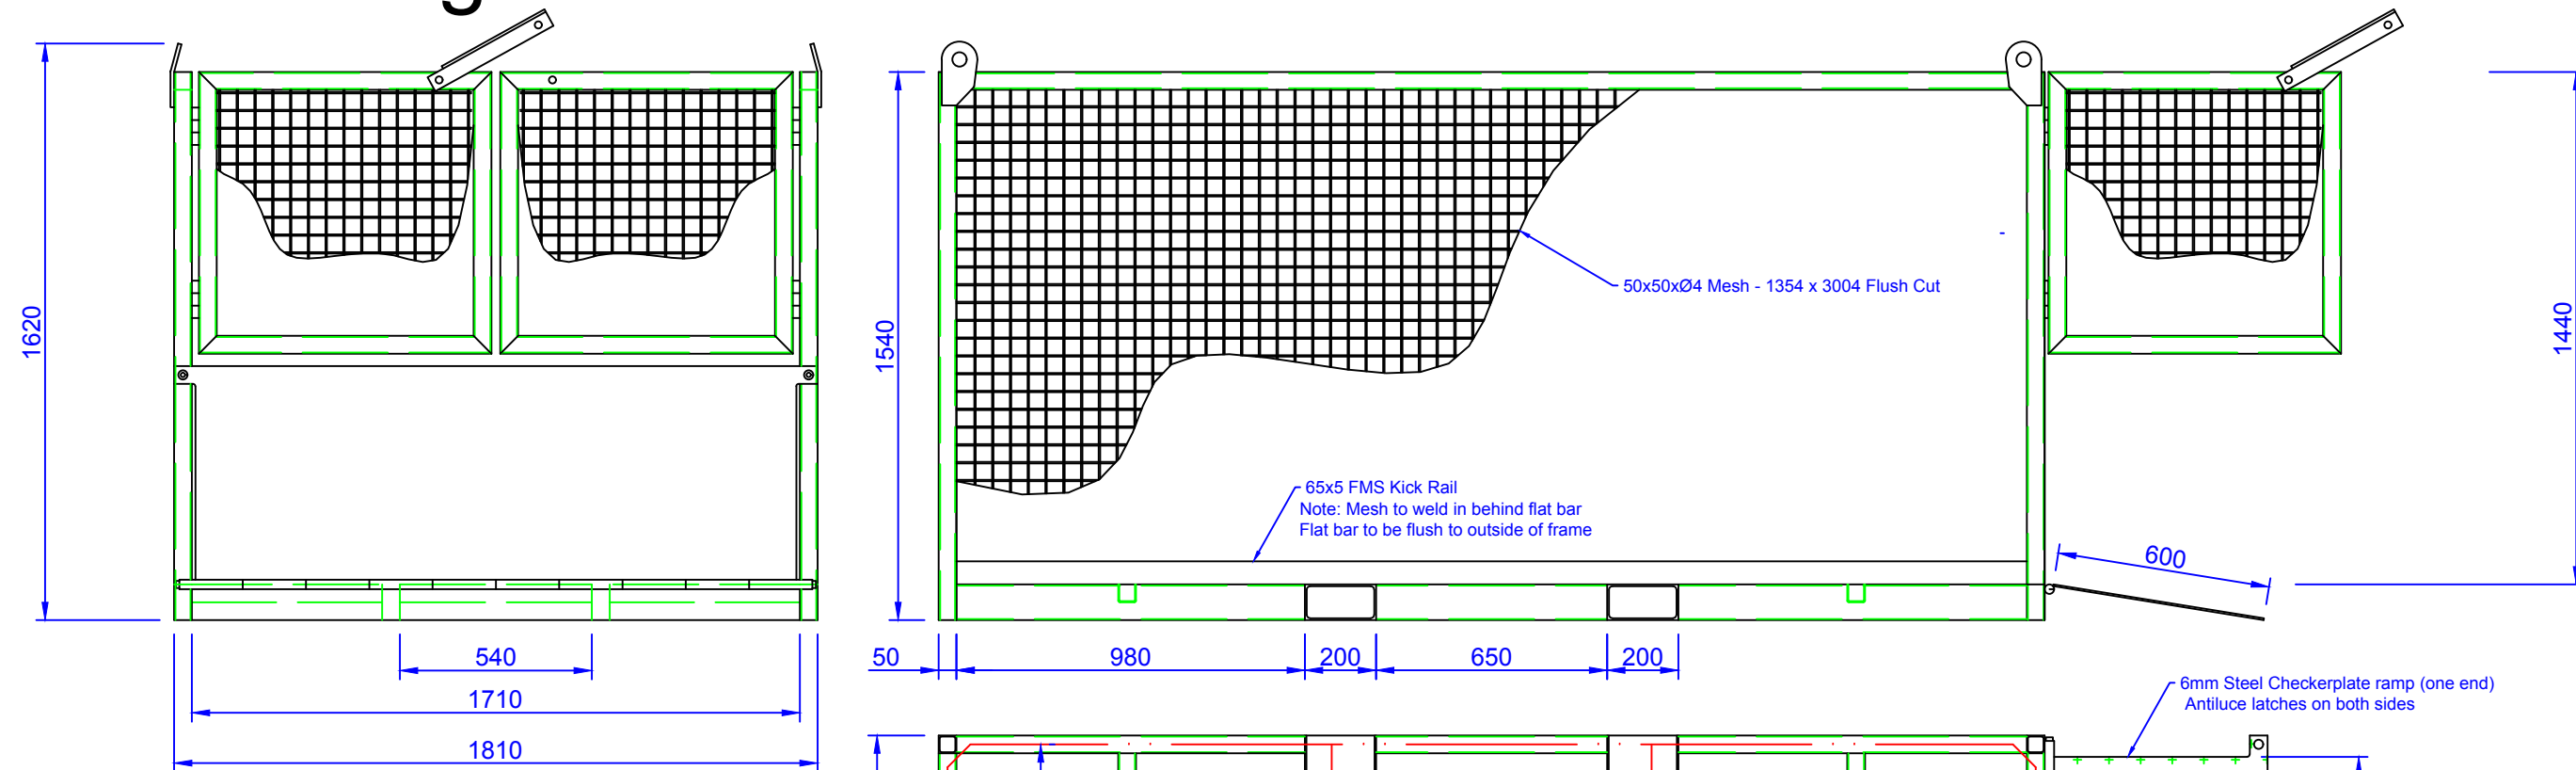

**bremco**  
METAL PRODUCTS  
59 Railway Parade, ROCKLEA QLD 4106  
(P) 617 3275 3422 (F) 617 3216 7909

This document is the copyright and IP of  
Bremco Metal Products P/L and must not be copied  
or loaned without the written consent of the Company



**DYNAMIC  
RIGGING HIRE**