50t TELESCOPIC SPREADER BEAM



仚

QUALITY LIFTING SOLUTIONS

TSB1504




DESCRIPTION

Tare Weight:	260kg (excluding shackles or associated rigging gear)
Lifting Lugs (top) suit:	35.0 tonne Grade 'S' safety bow shackle
Load Lugs (lower) suit:	25.0 tonne Grade 'S' safety bow shackle
Centre Lug suit:	6.5 tonne Grade 'S' safety bow shackle

PRODUCT ASSURANCE

Parent Standard:	AS4991		
Proof Load Testing	Yes		
MPI Weld Inspection	Yes		
Manufacturer's Guarantee	1 Year		

Span	WLL (tonnes)				Approx Sling Leg Length (Mtrs)			Approx Headroom (Mtrs)		
(Metres)	60°	90°	120°	CENTRE LIFT	60°	90°	120°	60°	90°	120°
2.8	50.0	30.0	18.0	6.0	2.8	2.0	1.6	2.4	1.4	0.8
3.2	50.0	30.0	18.0	5.25	3.2	2.3	1.8	2.8	1.6	0.9
3.6	50.0	30.0	18.0	4.5	3.6	2.5	2.1	3.1	1.8	1.0
4.0	50.0	30.0	18.0	3.75	4.0	2.8	2.3	3.5	2.0	1.2

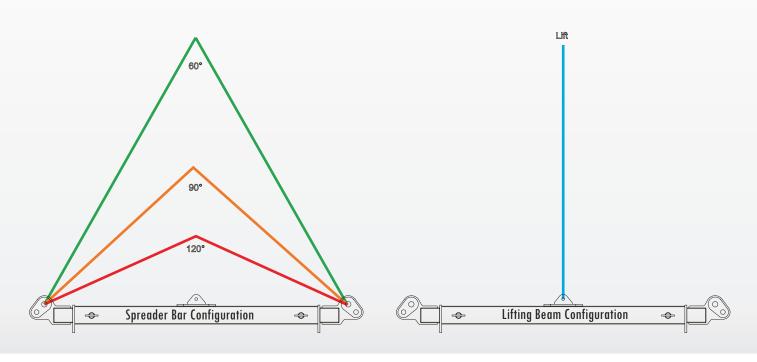



WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.

