



25t SPREADER BAR END CAP

Maxirig

QUALITY LIFTING SOLUTIONS




The Maxilug 25 allows users to create their own custom length, medium-lift spreader bar utilizing these heavy duty end units. Designed to accommodate readily available line pipe, Maxirig can supply the units as is or with various pipe lengths to facilitate lifts of varying dimensions up to 12 metres.

MAXIRIG PRODUCT CODE
MAXILUG25

Capacity:	25 tonne at 60° / 20 tonne at 90°
Tare Weight:	65Kg each / 130Kg per pair (excludes pipe or rigging)
Lifting Lugs (top) suit:	17 tonne Grade 'S' safety bow shackle
Load Lugs (lower) suit:	13 tonne Grade 'S' safety bow shackle
Intermediate Pipe:	273.1mm OD x 6.4mm Wall C350LO (42.1Kg / MTR)

PRODUCT ASSURANCE

Parent Standard:	AS4991 - 2004
Proof Load Testing	Yes
MPI Weld Inspection	Yes
Manufacturer's Guarantee	1 Year

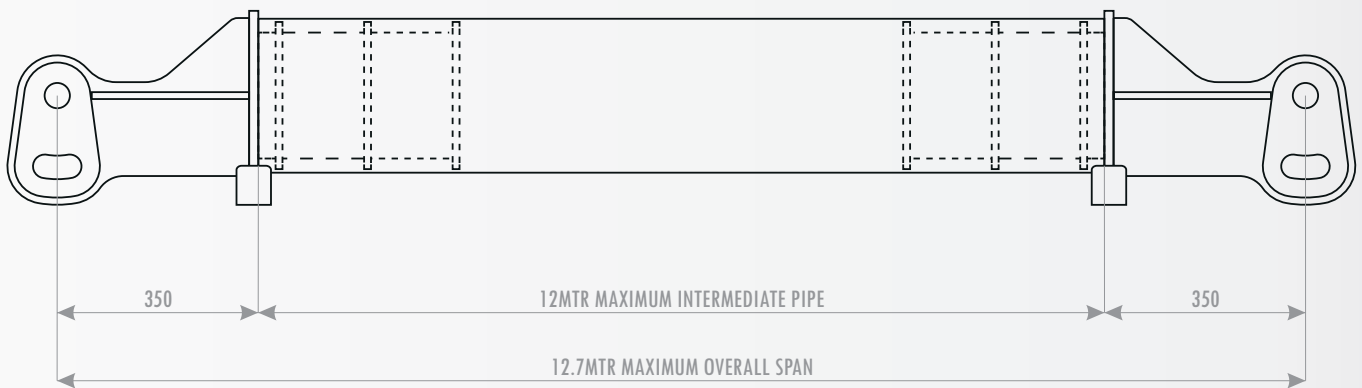

WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.



VISIT WWW.MAXIRIG.COM.AU