

Air winches



Dynamic Rigging Hire holds small air winches for general purpose hauling work (note not rated for lifting) with Toku and Ingersoll Rand brands of the powerful and easy to use HUL range.


All winches are fitted with high volume air filters with auto drain water traps and have quality exhausts to maintain a quiet operating environment.

Each winch is also mounted to a sub frame that allows secure fixing to the ground or other structures.

- ⇒ Supplied with user notes and pre-start check lists
- ⇒ Easy to operate single lever to pay in pay out winch wire
- ⇒ Variable speed control and ability to slow start winching
- ⇒ No duty cycle, operate all day long
- ⇒ Piston motor with oil bath lubrication
- ⇒ Band brake
- ⇒ Wire rope can be fitted to suit, maximum is 220m of 12mm 6x36 wire rope.
- ⇒ Certificate of test issued



Ingersoll Rand	Nominated line pull	Wire size	Wire length	Air inlet pres.	Air volume (Minimum)	Winch weight (Bare winch no wire)	5th layer line speed
HUL	1133kg	12mm	220m	90 psi	175cfm	255kg	34m/min

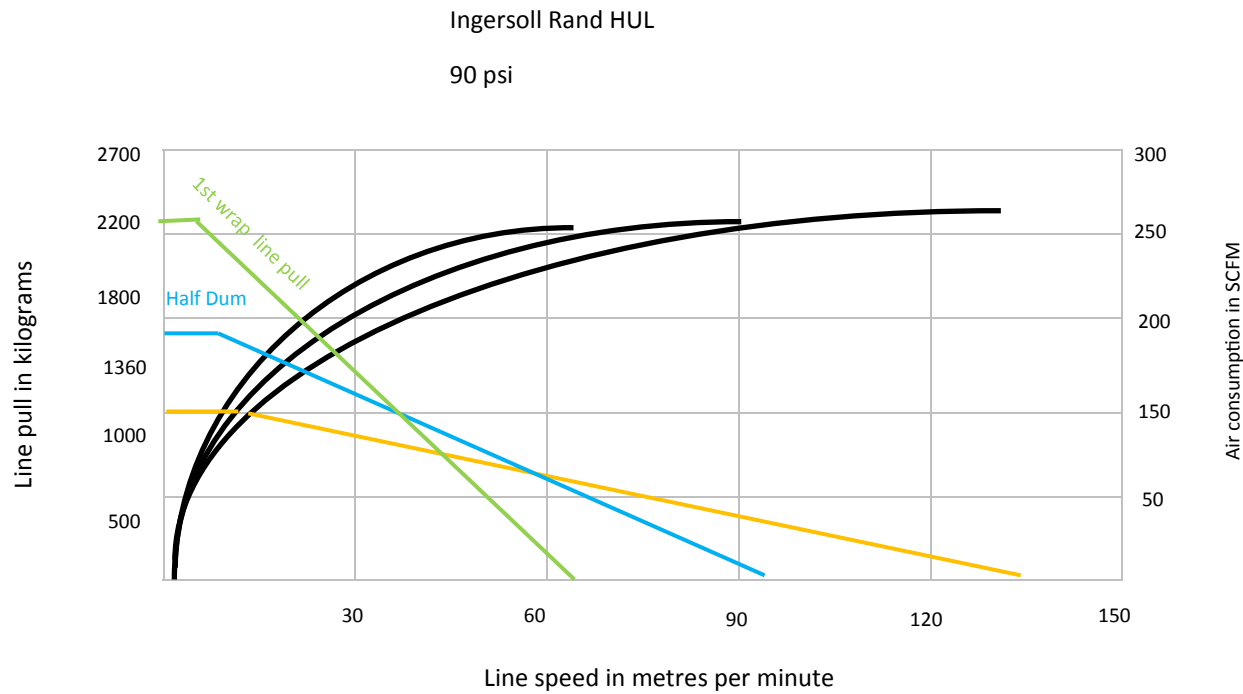

Dynamic Rigging Hire Pty Ltd

Factory 7/151 Doherty Road Laverton North, Vic 3026

www.dynamicrigging.com.au

sales@dynamicrigging.com.au

03 8360 8910

