

## Ti TAN TLH LEVER HOIST



# DYNAMIC RIGGING HIRE




### STANDARD FEATURES

- High strength steel frame and gear case built to be durable for rugged needs of construction and maintenance rigging.
  - 360 degree handle rotation with short stroke to ratchet loads.
  - Equipped with wide throat top and bottom drop forged hooks that are designed to bend slowly to warn of overloads.
  - Load chain is alloy steel grade 80 in accord with ISO3077 and EN818.7 standards.
    - Overload protection system. (Optional)
    - Caged needle roller bearings on load sheaves.
    - Cast safety latches.
    - Thrust bearings in bottom hook assembly.
      - Special surface treatment of spare parts.
      - Complies with AS/NZ1418 standard, also meets all pertinent world standards.
- Proof tested 1.5 x W.L.L.

Model	Capacity (t)	Standard Lift (m)	Effort Req. To Lift Rated Load (N)	Strands Of Load Chain	Load Chain Diam. (mm)	Min. Distance: H (mm)	Handle Length: D (mm)	A (mm)	B (mm)	C (mm)	Ø (mm)	E (mm)	N. W. (kg)
TLH090	9	1.5	390	3	10x30	730	418	204	114	342	85	50	47

Note - Dynamic Rigging Hire stock only 9t WLL lever hoists, these are currently the largest size on the market and all with the standard 1.5m of load chain length.

We recommend smaller sizes are more economical to purchase than hire, discuss your needs with our office on (03) 8360 8910.

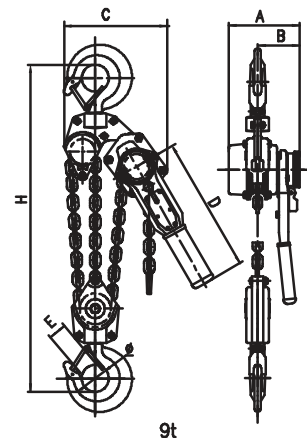

9t

**DYNAMIC RIGGING HIRE (03) 83608910**