

# Gunnebo Super Shackles

## Super Shackle No 858

### Bow shackle with safety bolt

Gunnebo Super Shackles are now available for hire from Dynamic in all sizes from 12.5t through to 40t WLL, these shackles feature a smaller pin diameter and are often the OEM specified shackle for construction equipment lifting points.


### Unique benefits with the Super Shackle

In certain situations, a demand for extra Working Load Limit occurs, in others the lifting environment has limited space for the lifting application. Gunnebo Industries has therefore added the Super Shackle to the range, enabling the same Working Load Limit on a 22 mm Super shackle as for a 28 mm Standard shackle.

The Super shackle meets the US Federal Specification RR.C-271. It is a grade 8 shackle and has all parts hot dipped galvanized, including the safety bolt.

### Specifications

<b>Standard:</b>	U.S. Fed. Spec. RR.C-271 Type IVA Class 3, Grade B
<b>Material:</b>	High Tensile Steel. Quenched and Tempered, Grade 8
<b>Finish:</b>	All parts hot dip galvanized + brown color marking
<b>Safety factor:</b>	5:1
<b>Documentation:</b>	Test certificate and traceable 3.1 certificate
<b>Temperature:</b>	-20°C to 200°C

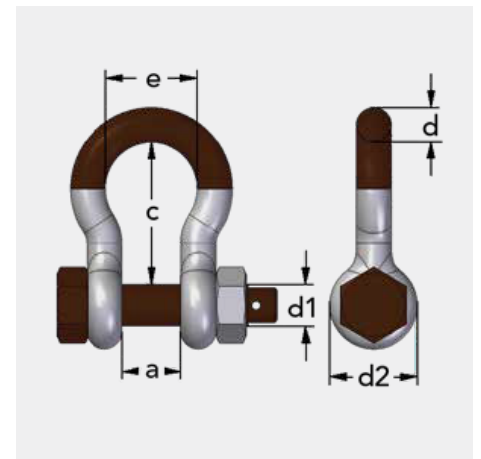

CE Split pin included

Art.no	WLL	Dim.	d Trade size			Weight			
			tonnes	d1	mm				
A085813	3.3	16	13	1/2"	21	51	33	33	0.4
A085816	5.0	19	16	5/8"	27	60	40	42	0.7
A085819	7.0	22	19	3/4"	31	71	48	49	1.2
A085822	9.5	25	22	7/8"	37	84	52	60	1.7
A085825	12.5	28	25	1"	43	95	60	68	2.5
A085828	15.0	32	28	1 1/8"	46	108	64	74	3.4
A085832	18.0	35	32	1 1/4"	52	119	72	83	4.8
A085835	21.0	38	35	1 3/8"	57	132	76	89	7.0
A085838	30.0	42	38	1 1/2"	60	146	84	98	8.8
A085845	40.0	50	45	1 3/4"	74	178	105	127	15

Max load	Breakaway	Min material thickness	Dead weight	Dimensions
1,500kg (flat steel) 750kg (round steel)	5,000kg	5mm	69kg	354 x 168 x 172mm 21