


General Arrangement

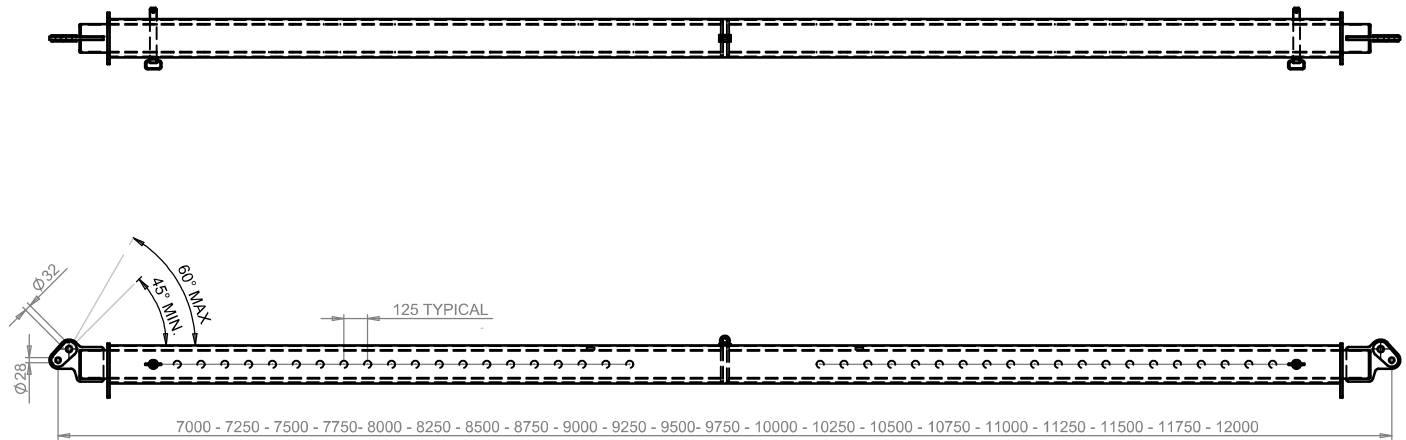


Lug Crowding

It is critical to strength of the device that rigging connections do not crowd the lug area. Failure to ensure sufficient gap between lugs and rigging connections can cause failure.


Incorrect Connection

Oversized hook or undersized shackle causes "leverage" on lug.

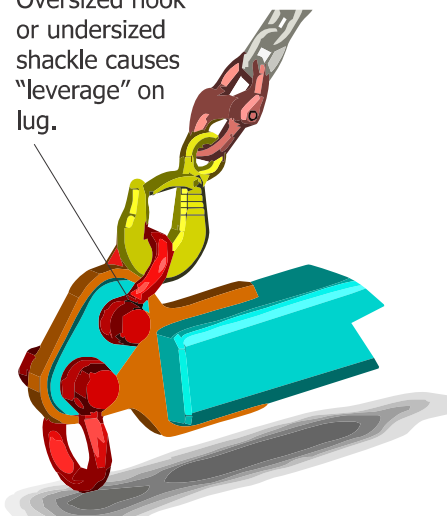

Correct Connection

Correctly sized rigging connections prevent additional forces being placed on lug.

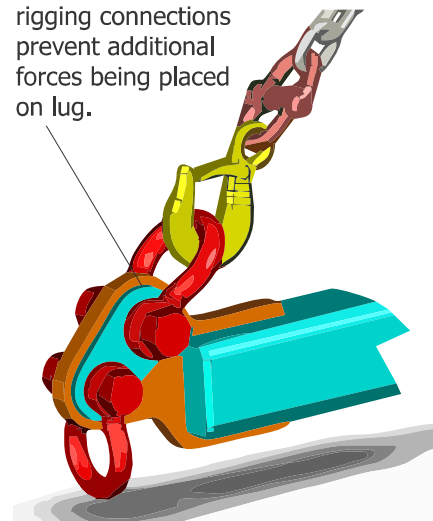

Load Chart

SPAN (Mtrs)	WLL (t) @ included sling angle				APPROXIMATE SLING LEG LENGTH (Mtrs)			APPROXIMATE HEADROOM (Mtrs)			TARE WEIGHT (t)
	60°	90°	120°	Centre Lift	60°	90°	120°	60°	90°	120°	
7.0	10.0	10.0	N/A	N/A	7.000	4.949	N/A	6.062	3.500	N/A	0.375
7.25	10.0	10.0	N/A	N/A	7.250	5.126	N/A	6.279	3.625	N/A	0.375
7.5	10.0	10.0	N/A	N/A	7.500	5.303	N/A	6.495	3.750	N/A	0.375
7.75	10.0	10.0	N/A	N/A	7.750	5.479	N/A	6.712	3.875	N/A	0.375
8.0	10.0	10.0	N/A	N/A	8.000	5.656	N/A	6.928	4.000	N/A	0.375
8.25	10.0	10.0	N/A	N/A	8.250	5.833	N/A	7.145	4.125	N/A	0.375
8.5	10.0	10.0	N/A	N/A	8.500	6.010	N/A	7.361	4.250	N/A	0.375
8.75	10.0	10.0	N/A	N/A	8.750	6.186	N/A	7.578	4.375	N/A	0.375
9.0	10.0	10.0	N/A	N/A	9.000	6.363	N/A	7.794	4.500	N/A	0.375
9.25	10.0	10.0	N/A	N/A	9.250	6.540	N/A	8.011	4.625	N/A	0.375
9.5	10.0	10.0	N/A	N/A	9.500	6.717	N/A	8.227	4.750	N/A	0.375
9.75	10.0	10.0	N/A	N/A	9.750	6.893	N/A	8.444	4.875	N/A	0.375
10.0	10.0	10.0	N/A	N/A	10.000	7.070	N/A	8.660	5.000	N/A	0.375
10.25	10.0	10.0	N/A	N/A	10.250	7.247	N/A	8.877	5.125	N/A	0.375
10.5	10.0	10.0	N/A	N/A	10.500	7.424	N/A	9.093	5.250	N/A	0.375
10.75	10.0	10.0	N/A	N/A	10.750	7.600	N/A	9.310	5.375	N/A	0.375
11.0	10.0	10.0	N/A	N/A	11.000	7.777	N/A	9.526	5.500	N/A	0.375
11.25	10.0	10.0	N/A	N/A	11.250	7.954	N/A	9.743	5.625	N/A	0.375
11.5	10.0	10.0	N/A	N/A	11.500	8.131	N/A	9.959	5.750	N/A	0.375
11.75	10.0	10.0	N/A	N/A	11.750	8.307	N/A	10.176	5.875	N/A	0.375
12.0	10.0	10.0	N/A	N/A	12.000	8.484	N/A	10.392	6.000	N/A	0.375

